


上ぶた式U形側溝 ふた

(JIS A 5372)

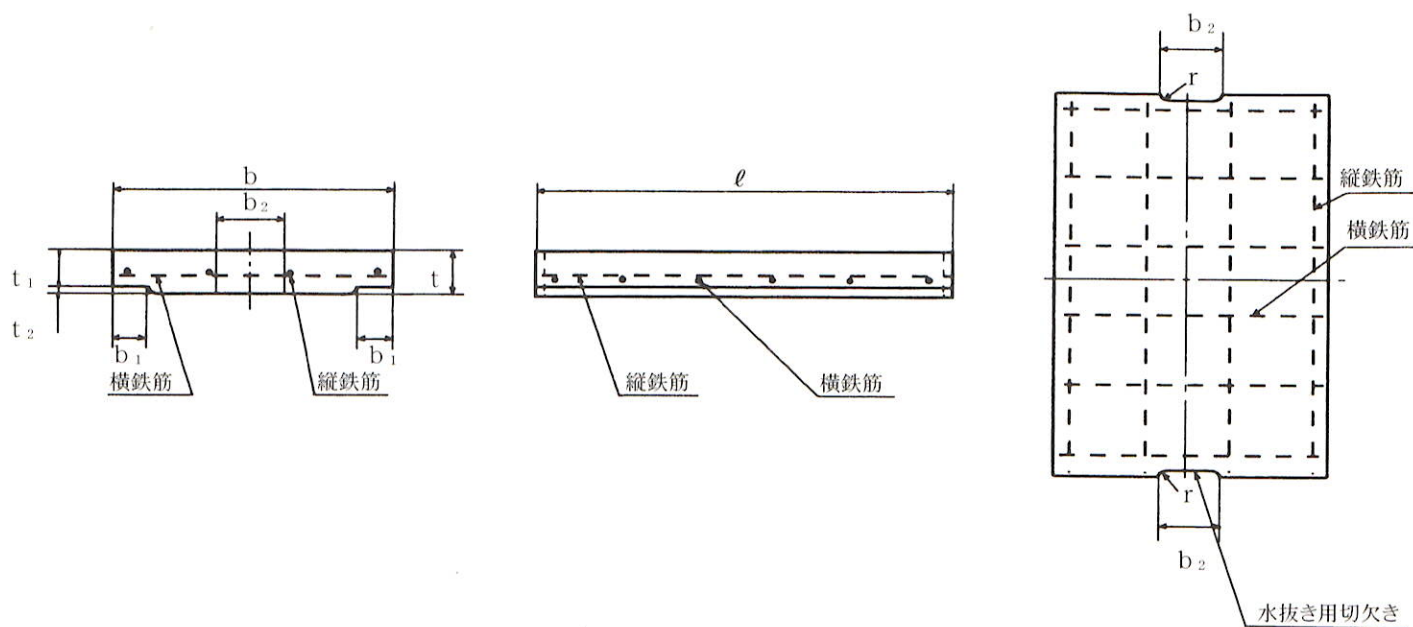

寸法、配筋、曲げ強度、参考質量表

単位 mm

区 分	呼 び 名	寸 法 (mm)								鉄 筋				曲げ 強度 荷重 (kN) 以上	参考 質量 (kg)
										縦鉄筋		横鉄筋			
		b	b ₁	t	t ₁	t ₂	ℓ	r	b ₂	径 (mm)	数量 (本)	径 (mm)	数量 (本)		
一 種	*100	160	35	30	25	5	600	15	70	2.6	3	2.6	5	—	6
	*120	180	35	30	25	5	600	15	70	2.6	3	2.6	5	—	7
	150	210	35	35	30	5	600	15	75	2.6	3	2.6	5	5	10
	180	250	40	40	35	5	600	15	75	2.6	3	2.6	6	6	14
	240	330	50	45	40	5	600	15	90	3.2	4	3.2	6	8	20
	300	400	55	60	50	10	600	15	100	3.2	4	4.0	6	10	33
	360	460	55	65	55	10	600	18	120	3.2	4	5.0	6	10	41
	450	560	60	70	60	10	600	18	120	4.0	5	D6.0	5	10	54
	600	740	75	75	65	10	600	18	150	4.0	6	D6.0	6	10	77
二 種	150	210	35	90	80	10	600	15	75	D6.0	3	D6.0	7	45	26
	180	250	40	90	80	10	600	15	75	D6.0	4	D6.0	5	40	31
	240	330	50	100	85	15	600	15	90	D6.0	5	D10.0	5	35	44
	300	400	55	100	85	15	600	15	100	D6.0	6	D10.0	6	30	54
	360	460	55	100	85	15	600	18	120	D6.0	7	D10.0	7	30	63
	450	560	60	120	100	20	600	18	120	D6.0	6	D10.0	7	40	92
	600	740	75	150	130	20	600	18	150	D6.0	6	D10.0	6	45	153

*は JIS 外製品