



落ちふた式 U 形側溝 本体

(JIS A 5372)


側溝1種

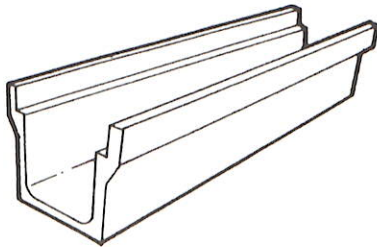

側溝3種

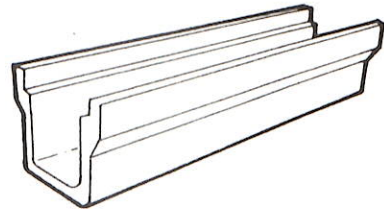

形状・寸法及び配筋

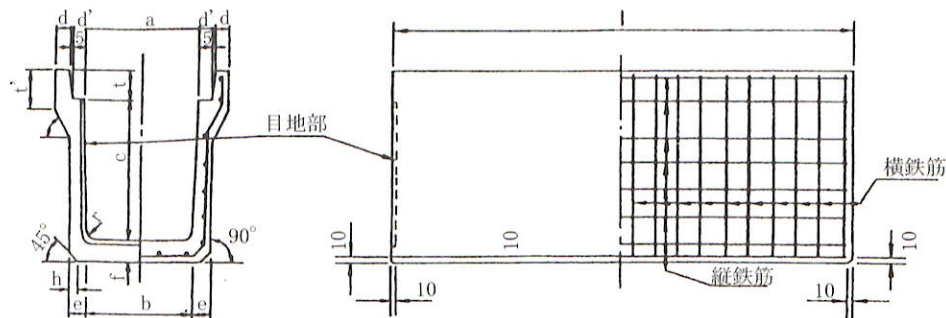

単位 mm

種類	呼称	寸 法 表 (mm)														配 筋 表								参考 質量 ℓ=2000 (kg)
																横 鉄 筋						縦 鉄 筋		
		外側鉄筋						底版内側鉄筋		径	数量 (本)													
径又は 呼び名	数量(本) ℓ=2000											ℓ=1000	径又は 呼び名	数量(本) ℓ=2000	ℓ=1000									
1種	250	250	230	250	40	55	55	55	20	90	120	50	450	395	2,000	4.00	10	6		4.00	11	290		
	300A	300	280	300	40	55	60	60	20	95	120	50	500	455	又は	4.00	10	6		4.00	11	348		
	300B	300	270	400	40	55	65	65	20	95	120	50	500	560	1,000	4.00	10	6		4.00	13	419		
	300C	300	260	500	40	55	70	70	20	95	120	50	500	665		5.00	10	6		4.00	15	496		
	400A	400	370	400	40	55	65	65	20	110	135	50	600	575		5.00	10	6		4.00	14	457		
	400B	400	360	500	40	55	70	70	20	110	135	50	600	680		5.00	10	6		4.00	16	536		
	500A	500	460	500	45	60	70	70	20	125	150	50	720	695		5.00	10	6		4.00	17	593		
	500B	500	450	600	45	60	75	75	20	125	150	50	720	800		D6	10	6		4.00	21	680		
3種	250	250	230	250	45	55	65	65	30	90	120	50	460	405	2,000	5.00	20	10	5.00	20	10	4.00	13	332
	300A	300	280	300	50	55	70	70	30	95	140	50	520	465	又は	5.00	24	12	5.00	24	12	4.00	13	419
	300B	300	270	400	50	55	70	70	40	95	140	50	520	565	1,000	D6	19	11	D6	10	6	4.00	15	471
	300C	300	260	500	50	55	80	80	40	95	140	50	520	675		D6	21	11	D6	11	6	4.00	17	584
	400A	400	370	400	55	55	70	70	40	110	140	50	630	580		D6	23	12	D6	12	6	4.00	17	516
	400B	400	360	500	55	55	80	80	40	110	140	50	630	690		D6	23	12	D6	12	6	4.00	19	634
	500A	500	460	500	60	60	80	80	40	125	155	50	750	705		D6	23	12	D6	12	6	4.00	20	699
	500B	500	450	600	60	60	90	90	40	125	175	50	750	815		D6	25	13	D6	13	7	4.00	24	849
寸法の許容差		±3							-	±3	-				±6	-								