


落ちふた式 U 形側溝 ふた




(JIS A 5372)

形状・寸法及び配筋

側溝ふた1種

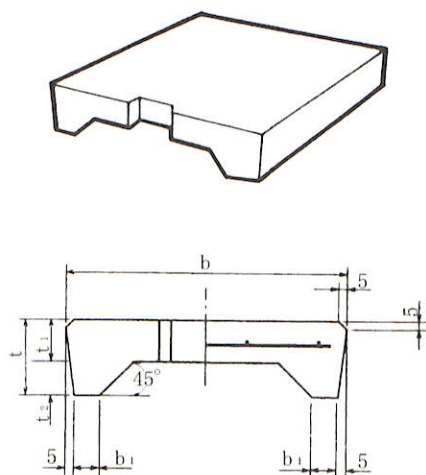

側溝ふた3種

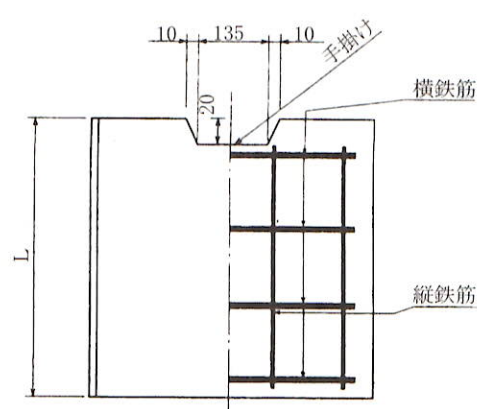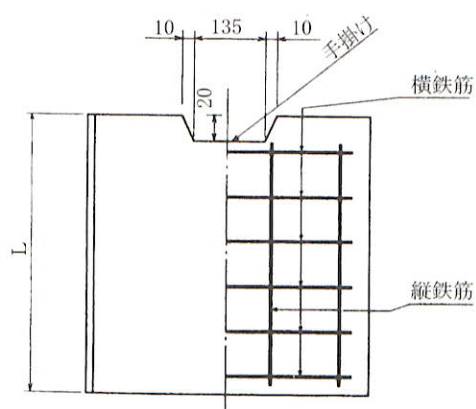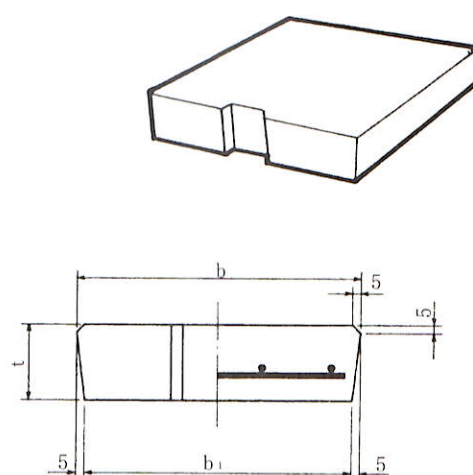

寸法、配筋、曲げ強度、参考質量表

単位 mm

呼 び 名		寸 法 (mm)						鉄 筋				曲 げ 強 荷 重 (kN)	参 考 質 量 (kg)
								横 鉄 筋		縦鉄筋			
		b	b ₁	t	t ₁	t ₂	ℓ	径 (mm)	数量 (本)	径 (mm)	数量 (本)		
1 種	2 5 0	362	50	90	55	35	500	4.0	6	4.0	3	9	29
	3 0 0	412	51	95	55	40	500	4.0	6	4.0	4	8	33
	4 0 0	512	51	110	65	45	500	4.0	6	4.0	5	9	47
	5 0 0	622	56	125	75	50	500	4.0	6	4.0	6	9	65
3 種	2 5 0	362	352	90	—	—	500	D6	6	D6	3	28	38
	3 0 0	412	402	95	—	—	500	D10	4	D6	4	27	46
	4 0 0	512	502	110	—	—	500	D10	5	D6	5	28	66
	5 0 0	622	612	125	—	—	500	D10	6	D6	6	30	92
許 容 量		±3	—	±3	—		±3						